
Containment Recommendation - 01

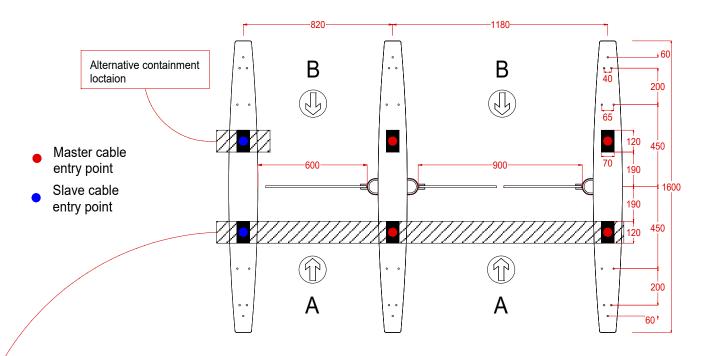

RECOMMENDED CONTAINMENT SIZE AND CABLE REQUIRMENTS - leave all cables tails 3mts long.

ESP recommend using underfloor box truncking with a minimum of 3 separate compartments, each compartment should be at least 50x50.

Compartment A = Electrical supplies to each master unit. Single phase 3 x 2.5mm, 1.5 Amp (By others, unless requested at the tender stage).

Compartment B = Control Cables.

- Link cable supplied with the equipment. Link between each master and slave unit.
- 4mm earth cable to be supplied by others, Earth link between the last master and last slave unit.

PART NAME

Compartment C = Access control and optional desk top

- Optional desk top console, (by others, unless requested at tender stage). One cable to each master unit, recommend, 12core type 0.5YY cable.
- Access control and fire alarm to be specified by others.

Fire Alarm input = Separately feed, volt free, normal OPEN contact, is required for each master unit.

Access Control = Open Cmd's, separately feed to each master unit, volt free normal open contact, closing for less than 1 second is required for each direction of controlled travel.

DATE	21/01/17
DRAWN	A Brown
CHECKED	
APPROVED	
SCALE.	

PG30x Containment Recommendation - 01

SHEET		1 OF	100		
	DWG B SIZE	DRAWING No.	PG	330x-100-000a	REV 0

